



PLATINUM

# HEATMAXX®

## 65

## HEATMAXX 65 #1


### KEY FEATURES

- **The only turf warranted against reflective burns and melting from Low-E windows**
- Melt-proof up to 460 degrees with Class A Rating, ASTM E108 for Rooftop use, without infill
- Our Nylon products have passed the rigorous ASTM E85 testing, allowing them to be used indoors + out
- 100% Nylon Yarns - Delivers superior performance
- Full Anti-Microbial Construction
- Cooling Technology - lowers lawn surface temperature
- Certified by the ASTM D2859 & ASTM E84 Federal Flammability Standard

### RECOMMENDED APPLICATIONS



### FOOT TRAFFIC

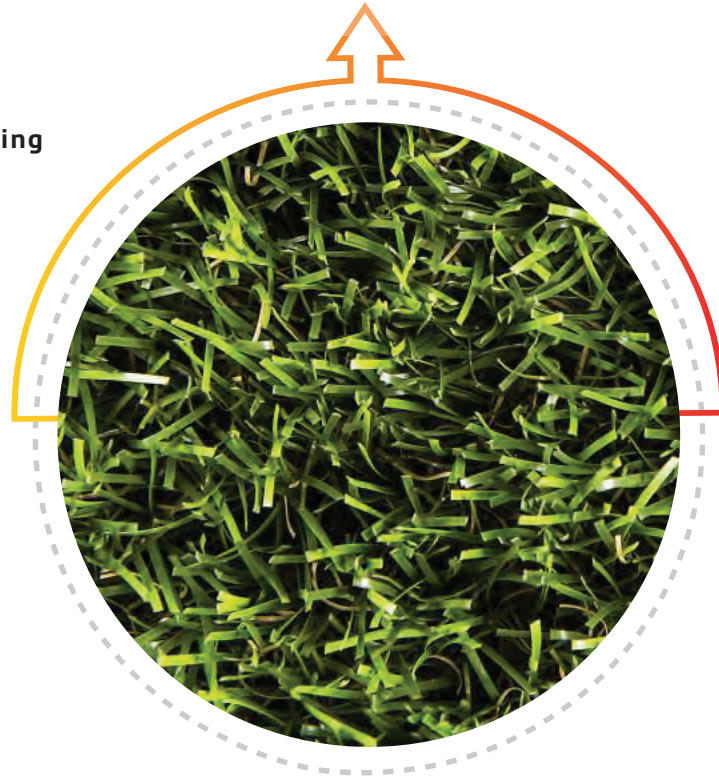

### PRODUCT SPECIFICATIONS

Yarn Type .....	Nylon
Yarn Color .....	Verde & Lime Green
Thatch Color .....	Verde Green & Tan
Face Weight .....	65 oz/sy
Pile Height .....	1-1/2"
Backing .....	Black Urethane
Width .....	15 ft
Warranty .....	15-Year Warranty



844.368.4765 | [www.GoGreenSynTurf.com](http://www.GoGreenSynTurf.com)



# ARCHITECT


## DESIGN AND BUILD

### TESTING SPECIFICATIONS


AATCC 134 - Anti-Static .....	Pass
ASTM C1028 - Static / Friction .....	Pass
ASTM D1335 - Tuft Bind .....	16.5 LB
ASTM F2765 - Lead Levels .....	<0.01ppm
ASTM D2859 - Flammability (Pill Test) .....	Pass
ASTM E648 - Flammability (Critical Radiant Flux) .....	Pass
ASTM 5034 - Grab Tear Strength .....	Pass
ASTM F1951 - ADA Wheelchair.....	Compliant
ASTM F1551 - Water Permeability.....	575.15 in/hr
ASTM E108 - Fire Test (Roof Decks) .....	Class A
ASTM E84 - Surface Flammability / Smoke Density.....	Class C
ASTM 1292 - Impact Attenuation .....	Pass

### [GoGreenSynTurf.com](http://GoGreenSynTurf.com) | Resources

- Platinum HeatMaxx 65® .....
- 2D CAD Files
- BIM and 3D Files
- Specifications

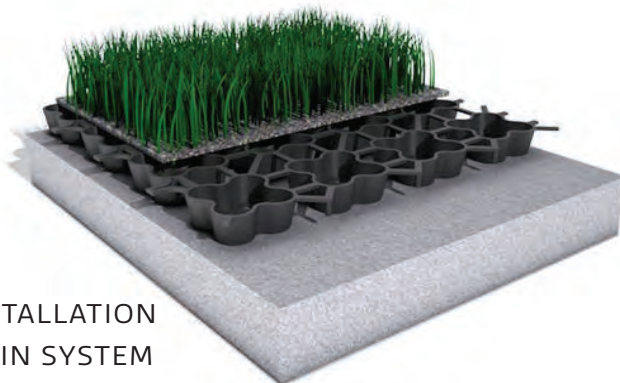

ROOFTOP INSTALLATION  
WITH AIRDRAIN SYSTEM

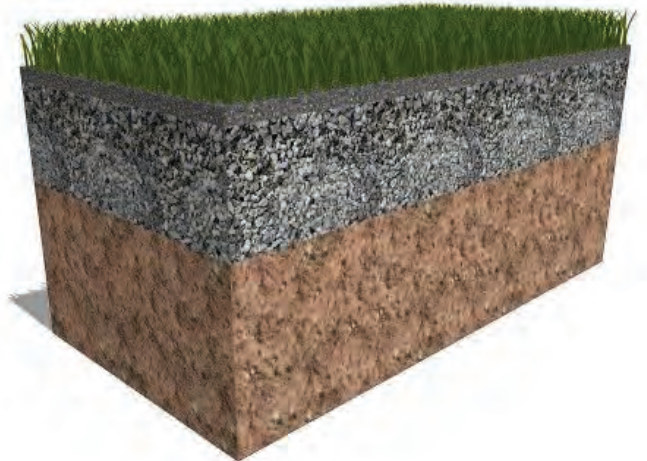

BASIC INSTALLATION OVER AGGREGATE BASE